


ANYTIME FITNESS NEW FLOOR SYSTEM INSTALLATION

The following is the progress made regarding the new floor system at Anytime Fitness which will mitigate noise issues from the gym at Centuria. Flooring was completed Friday, March 27, 2026.

Day 1: March 23, 2026

To the right is the progress today. 1 layer plywood glued in the weight area and under ½ purple turf.

Below is a close-up of the 2nd layer over the plywood layer which consists of panels with insulation attached.

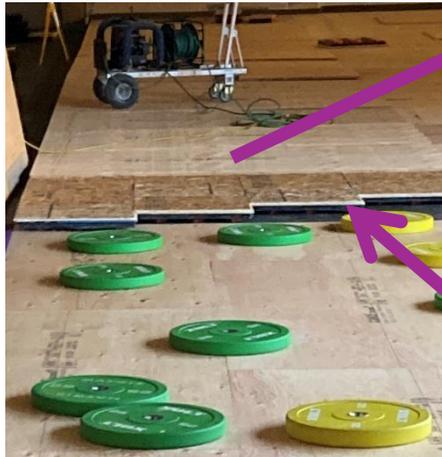

To the right is a close up of the insulation panel which are 2'x2' pieces with insulation felt material glued onto waferboard with orange rubber bumpers.



ANYTIME FITNESS NEW FLOOR SYSTEM INSTALLATION

Day 2: March 24, 2026

The entire floor system received 2 additional layers of plywood. To the right below a cross section reveals:

- 1 layer plywood
- 1 layer 2'x2' insulated waferboard panels
- 2 additional layers of plywood laid cross grain



Day 3: March 25, 2026

Final layer of plywood was re-fastened, and system was inspected by the firm giving Anytime Fitness a guarantee for the new subfloor system.

Sound absorbing interlocking floor material set in place and is ready for installation.



ANYTIME FITNESS NEW FLOOR SYSTEM INSTALLATION

Day 4: March 26, 2026

Sound absorbing interlocking floor material is being installed over the double plywood sub straight system. The total thickness of the entire floor system is provided to the right.



Day 5: March 27, 2026

Finishing touches on the gym floor system.

